

# CURIOUSA

## 80mm CEILING ROSE

### *Step 1*

Install the ceiling bracket using appropriate fixings (not provided) for the ceiling, sufficient to safely hold the weight of your Curiousa light piece as specified on your invoice.

### *Step 2*


Your light will have been supplied with 1m of flex which you can adjust if necessary by unscrewing the metal cap on the cord grip. Loosen the internal black plastic grip, adjust the flex to the desired height and then simply re-apply the cord grip. Ensure cap is screwed tight to compress the grip to hold the flex securely.

### *Step 3*

Store excess flex inside the ceiling rose or remove safely, before connecting to the isolated mains using the Wago levered terminal connectors.

### *Step 4*

Finally, attach the ceiling rose to fitted bracket using the two knurled screws provided.

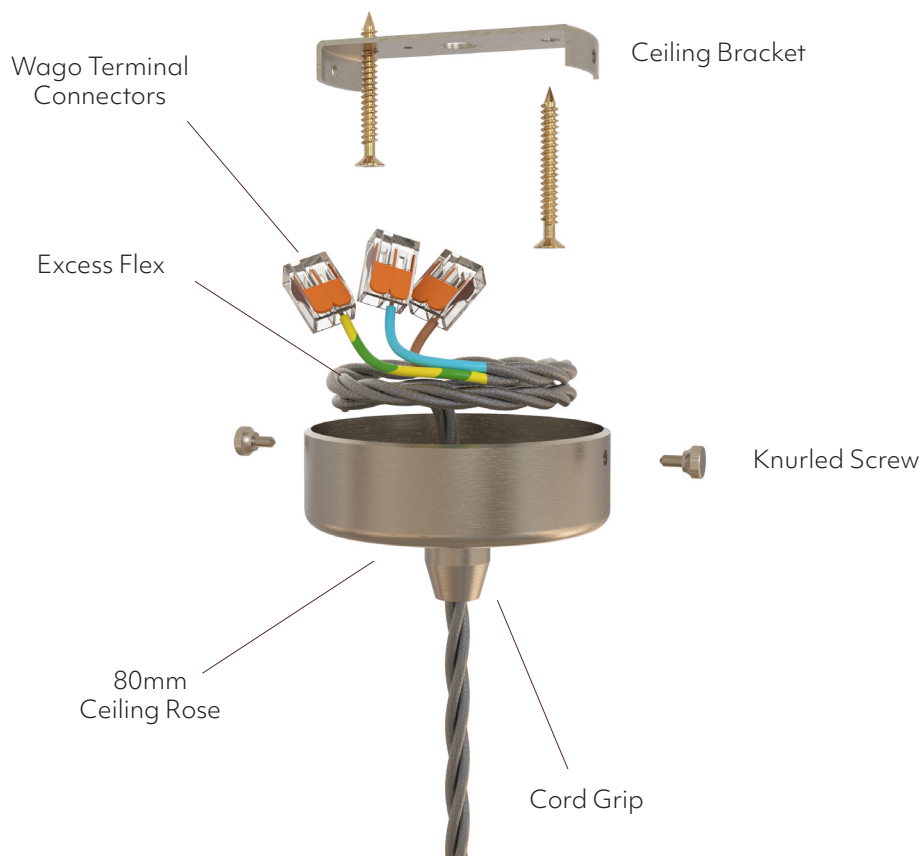

Curiousa have prepared your light piece or chandelier ready for your **qualified electrician** to connect to your house mains supply and have included detailed instructions above. If your electrician has any questions or would like further advice we are only a phonecall away on **01629 826284**